
SANYO

Cadnica



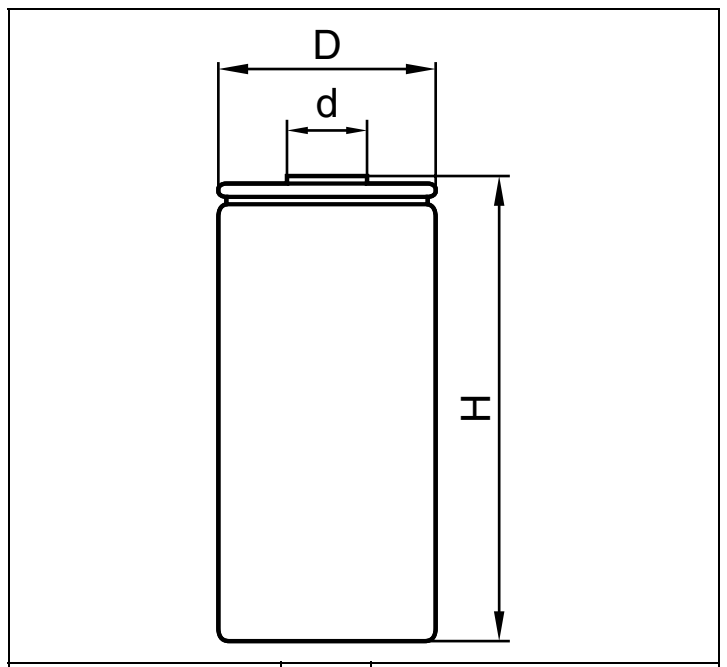


Dimensions of Bare Cell			
	H	90.0 $^{\pm 0.4}$	mm
		3.543 $^{\pm 0.016}$	inch
	D	42.1 $^{\pm 0.3}$	mm
		1.657 $^{\pm 0.012}$	inch
	d	15	mm
		0.591	inch

Cell Type KR-10000M Specifications


Nominal Capacity		10000mAh
Nominal Voltage		1.2V
Charging Current		1000mA
Charging Time		14 to 16Hrs.
Ambient Temperature	Charge	0°C to +45°C [+32°F to 113°F]
	Discharge	-20°C to +60°C [-4°F to 140°F]
	Storage	-30°C to +50°C [-22°F to 122°F]
Internal Impedance (Av.) (at 50% discharge)		2.6mΩ (at 1000Hz)
Weight		400g/14.11oz
Dimensions(D)×(H) (with tube)		43.1 $^{0}_{-1}$ × 91.0 $^{0}_{-1.4}$ mm 1.70 $^{0}_{-0.04}$ × 3.58 $^{0}_{-0.06}$ inch

Typical Characteristics


Charge

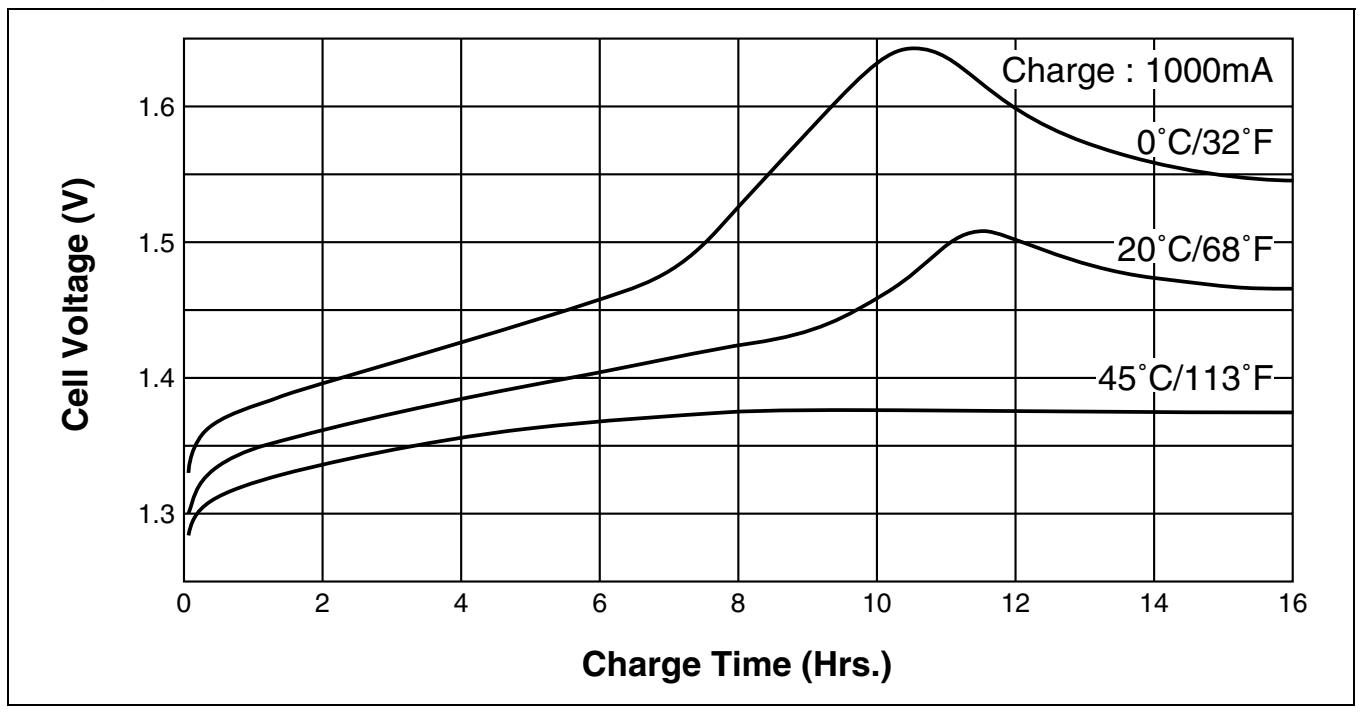


Discharge (at high rate)

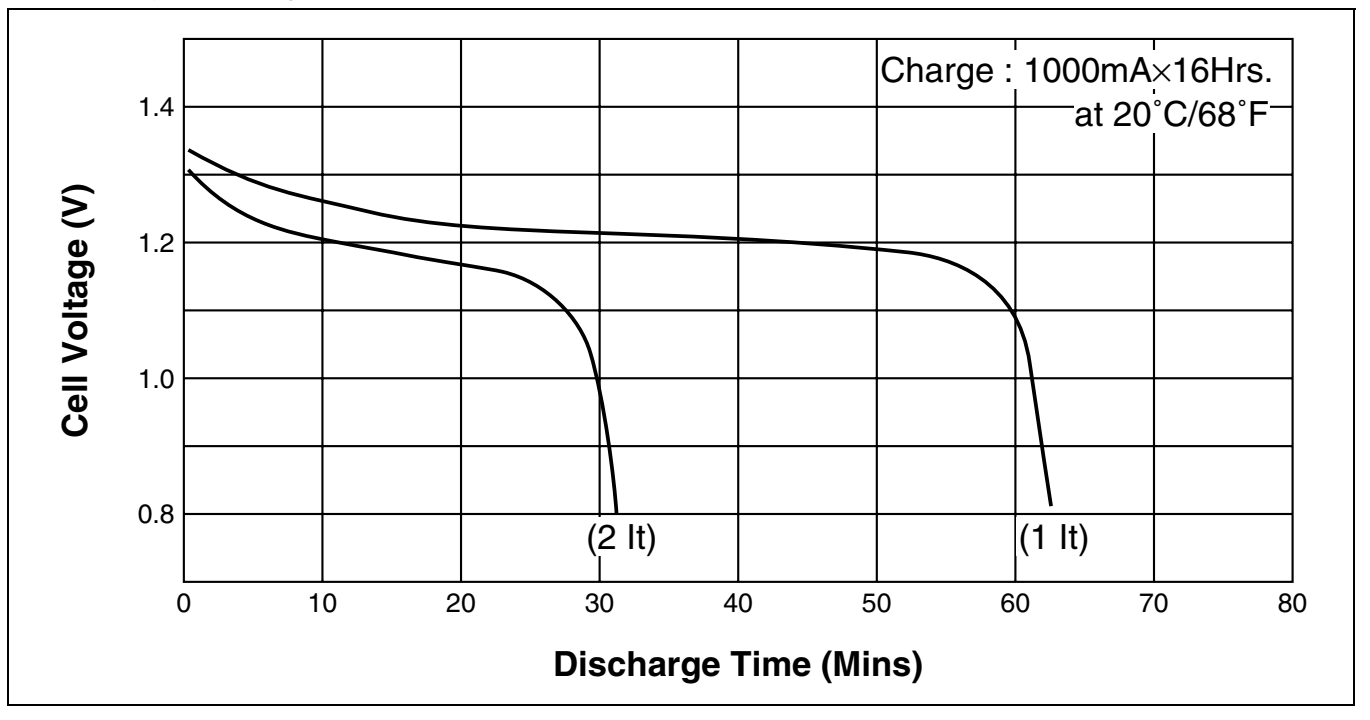


Cell Capacity (at various discharge rate)

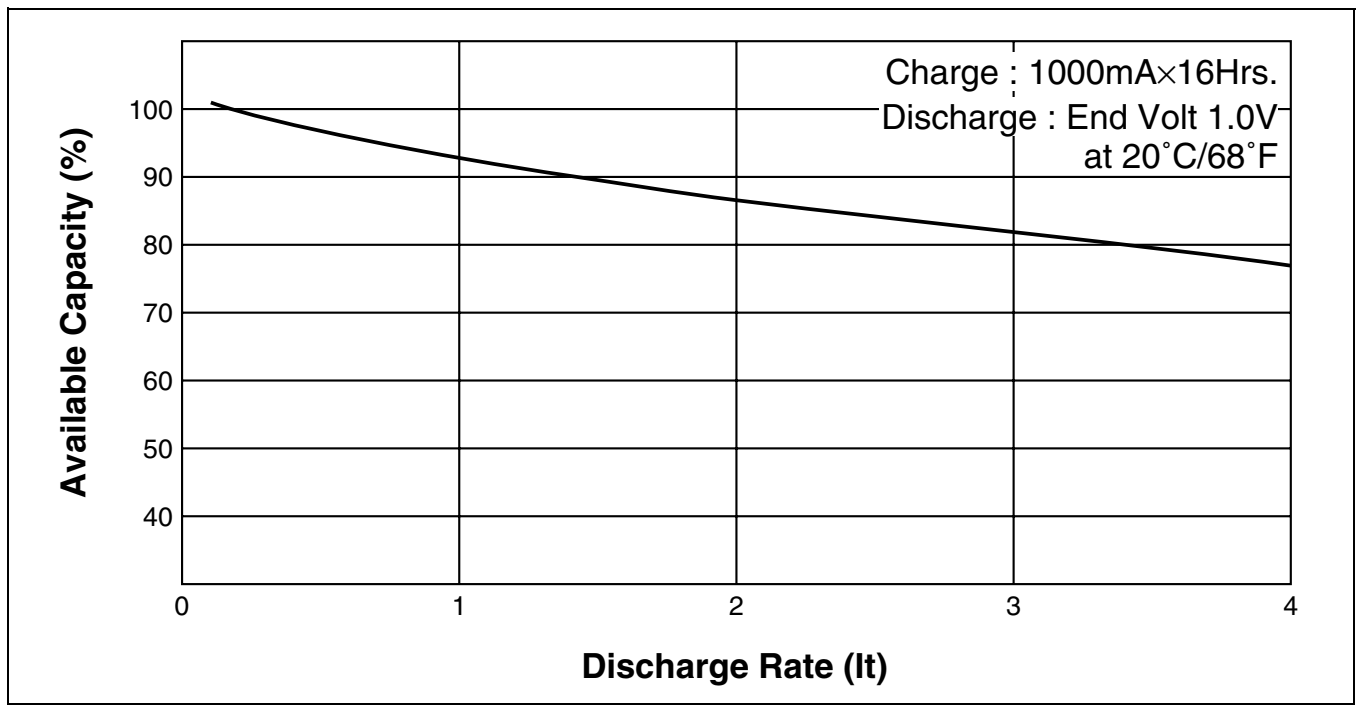


Discharge (at high rate)

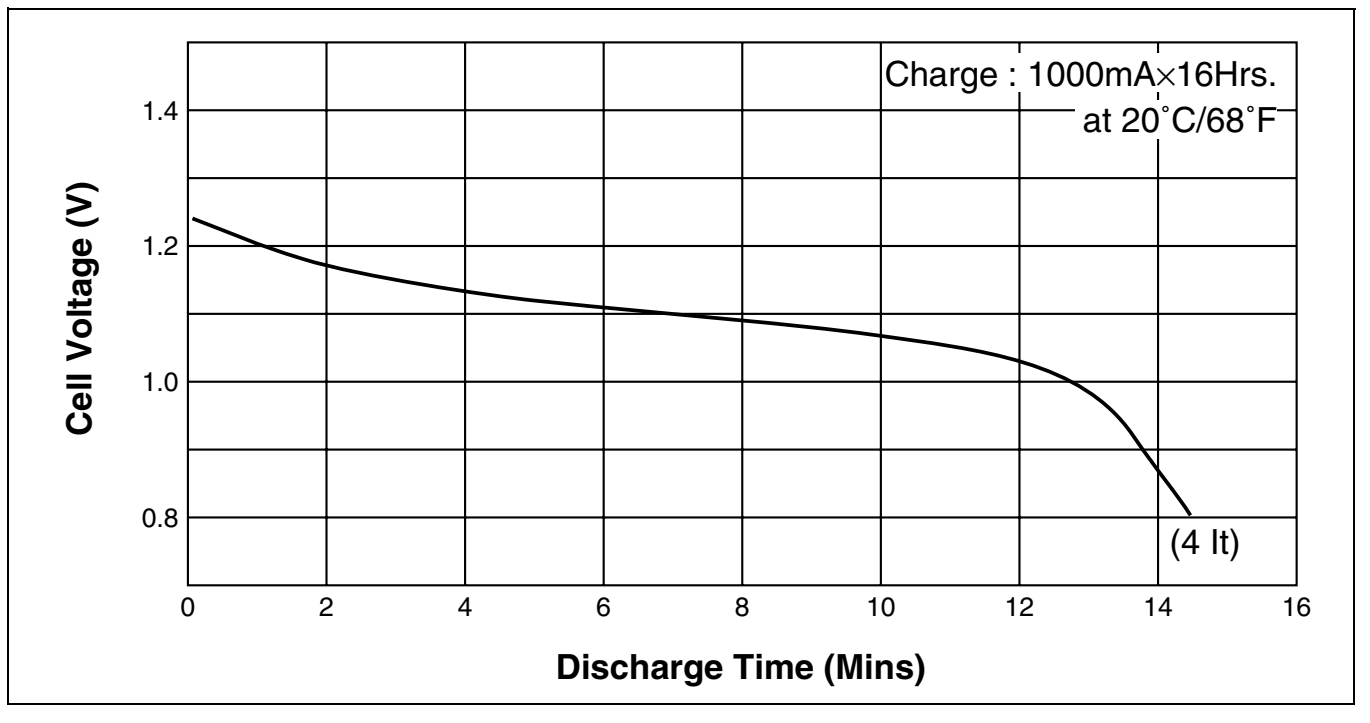

Discharge (at low rate)

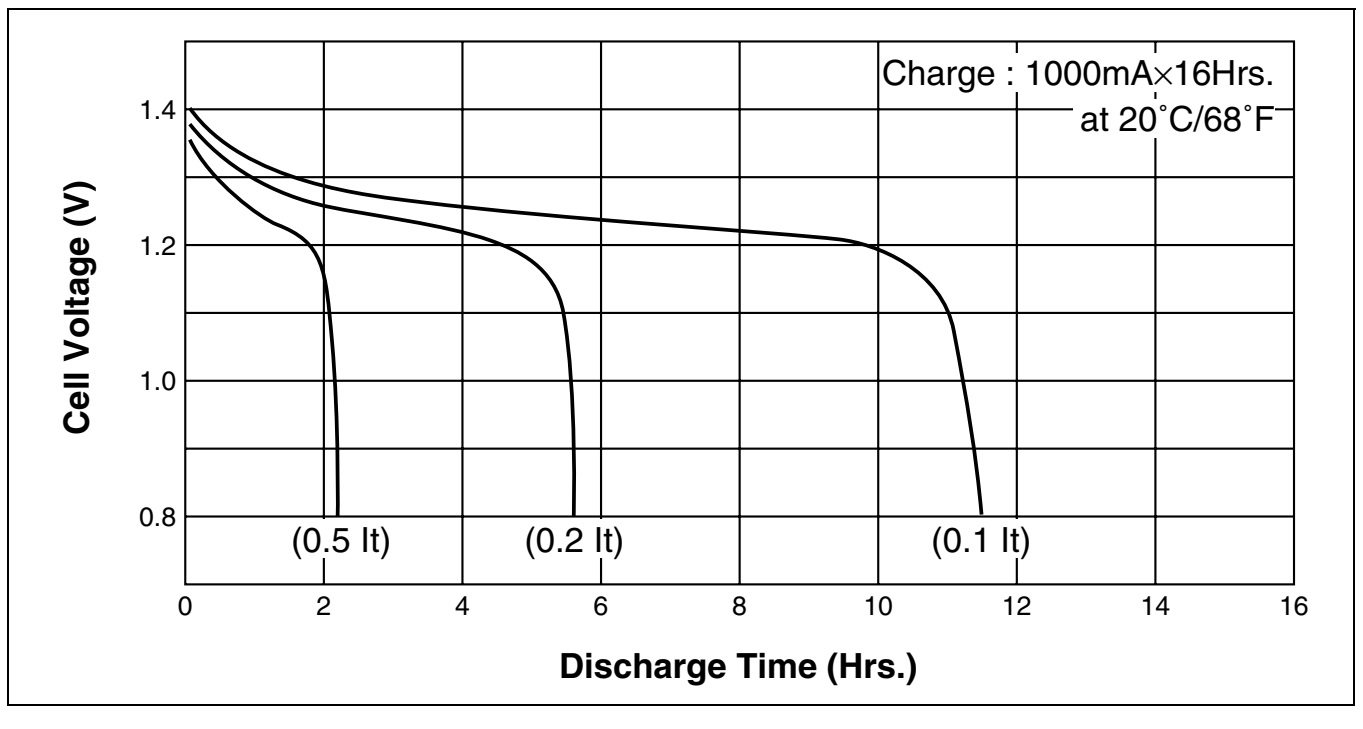

Temperature (Charge & Discharge)

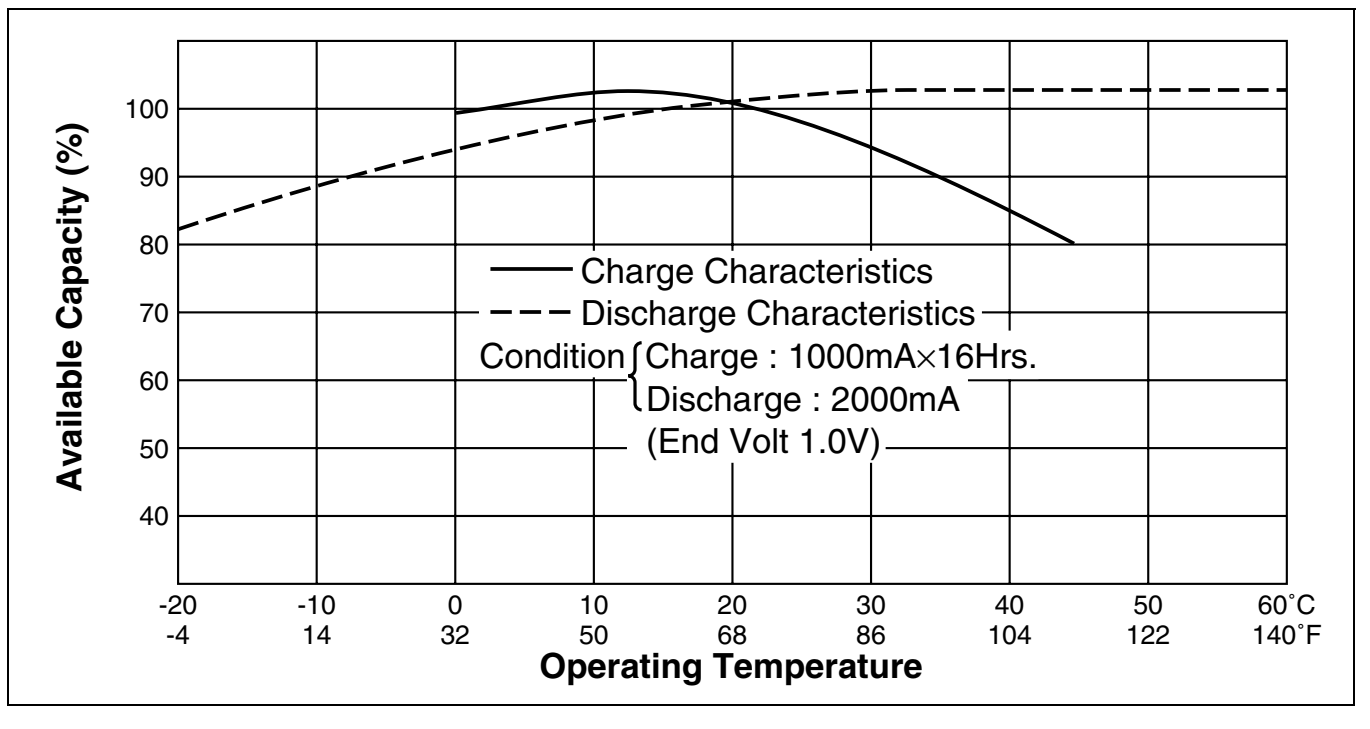

CD010830